




LIFE PAINT™

SPECIFICATION
GML-PCS
HOT DIPPED 2.5 GALVANIZED METAL LATH

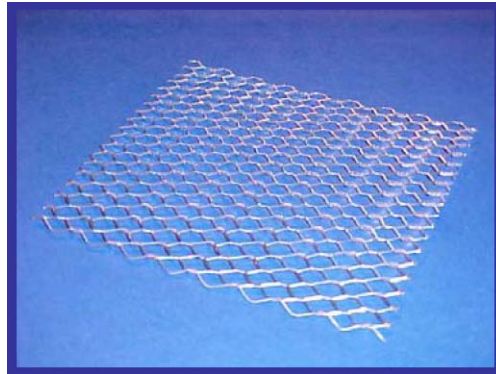

Wt. Per Sq. Yd.	Sheet Size	Pcs. / Bdl.	Yds. / Pallet
1.75 lbs.	27" x 96"	10	1000
2.50 lbs.	27" x 96"	10	1000
3.40 lbs.	27" x 96"	10	1000

50 bundles per pallet

Life Paint's GML-PCS hot dipped 2.5 galvanized Metal Lath is a versatile metal lath ideal as a plaster base and reinforcement for all types of walls, ceilings and fireproofing of steel beam, and columns. Easy to cut and form to ornamental plaster work. Provides ample keying for scratch coat and is commonly used for plaster machine application. This lath meets the following specifications:

Federal Specification - QQ-L-101C American National Standard Specification - ANSI A42.3 and A42.4 American Society for Testing Materials - ASTM C841 and ANSI/ASTM C847

U. S. Department of Housing and Urban Development (HUD) Standards 4930.1 Uniform Building Code, 2001 Calif. Bldg Code, 2003 IBC - Chapter 25 For further information see ICBO ES Report No. 4120